

6 Fiber oC2Plus™ Fanout Kit 2 Ft

\$22.99

oC2Plus™ Fanout Kits are designed to be a labor-cost effective solution saving you both time and money. They are specifically designed for the termination of 6, 8, 12 and 24 fiber buffer tubes. These fanout kits provide the ultimate solution for those users who want a robust, simple, yet reliable and user-friendly product. The kits provide a compact, easy-to-install fanout solution requiring no additional hardware or space than that required for terminating tight-buffered cables. The fanout kit is available in standard lengths of 2 feet (31.12 inches) or 3 feet (37.88 inches). The kits have the capability for custom lengths, color of furcation tube, multi-configuration and multi-fiber solutions. Visit the Custom Quote page for custom requirement request.

Features:

- Compact ABS Hard Plastic Housing
- Plenum Jacket Furcation Tube with Aramid Yarn
- Snap-fit Function
- Eliminates the Requirement for Epoxy Glue
- 3-Piece Simple Step-by-Step Assembly
- Tensile Strength Exceeds Industry Standards by up to 230%
- Designed for Custom Multi-configuration and Multi-fiber Solutions
- Universal with any Manufacture's Cabling
- TIA/EIA-568-B Compliant
- Quality Level Meets or Exceeds

ISO9001:2008

Specifications:

Environment: Indoor Housing Material: ABS Hard Plastic Housing Dimensions: 0.56 (H) x 2.62 (L) in Weight: .80 oz (6-8 strand) to .96 oz (12-24 strand) Fanout Type: Furcation Tube Product Type: Fiber Optic Fanout/breakout Kits Cable Type: Plenum Furcation Tube with Aramid Yarn (900 micron center tube) Fanout Tubing Color: Aqua Fiber Count: 6 Tubing Length (Feet): 2 Ft Tubing Length (Inches): 31.12 in Tubing Outer Diameter: 2.0 mm Flammibility (Housing): Grade: ABS HI121 - 9059 BK | Test Standard: FMVSS 302 | 168 hrs. annealed at 80°C - Results: 54 mm/min Flammibility (Furcation Tubing): LSZH meets the requirements of IEC 61034-1, 61034-2, 60332-1-1, 60332-1-2, 60754-1, 60754-2 Temperature - Operation (Metric): 0 C to 70 C Temperature - Operation (US): 32 F to 158 F

Tech Info:

RoHS & Reach Compliant

Warranty:

Lifetime

Tech Support:

Lifetime

Assembly Instructions:

See the Assembly Instructions page for step-by-step simple instructions.


How To Purchase:

Purchase online, over the phone or email your purchase order. Call: 1-800-719-6791 or Email: solutions@ucon-x.com U.S. Patent No. 9,459,427 ©2020 oC2Plus. All Rights Reserved. All specifications are subject to change without further notice.

SKU: oCB1A21Plus102F. Category: Fiber Optic Fan-out Kits.

Weight	<i>0.04 lbs</i>
---------------	-----------------

Dimensions	<i>6 × 6 × .5 in</i>
-------------------	----------------------

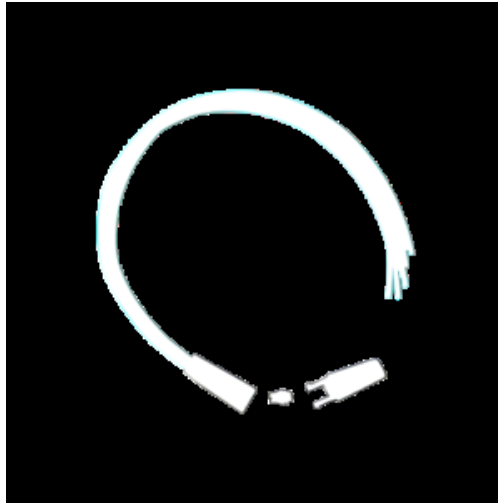

6 Fiber oC2Plus™ Fanout Kit 3 Ft

\$23.99

oC2Plus™ Fanout Kits are designed to be a labor-cost effective solution saving you both time and money. They are specifically designed for the termination of 6, 8, 12 and 24 fiber buffer tubes. These fanout kits provide the ultimate solution for those users who want a robust, simple, yet reliable and user-friendly product. The kits provide a compact, easy-to-install fanout solution requiring no additional hardware or space than that required for terminating tight-buffered cables. The fanout kit is available in standard lengths of 2 feet (31.12 inches) or 3 feet (37.88 inches). The kits have the capability for custom lengths, color of furcation tube, multi-configuration and multi-fiber solutions. Visit the Custom Quote page for custom requirement request.

Features:

- Compact ABS Hard Plastic Housing
- Plenum Jacket Furcation Tube with Aramid Yarn
- Snap-fit Function
- Eliminates the Requirement for Epoxy Glue
- 3-Piece Simple Step-by-Step Assembly
- Tensile Strength Exceeds Industry Standards by up to 230%
- Designed for Custom Multi-configuration and Multi-fiber Solutions
- Universal with any Manufacture's Cabling
- TIA/EIA-568-B Compliant
- Quality Level Meets or Exceeds ISO9001:2008

Specifications:

Environment: Indoor Housing Material: ABS Hard Plastic Housing Dimensions: 0.56 (H) x 2.62 (L) in Weight: .80 oz (6-8 strand) to .96 oz (12-24 strand) Fanout Type: Furcation Tube Product Type: Fiber Optic Fanout/breakout Kits Cable Type: Plenum Furcation Tube with Aramid Yarn (900 micron center tube) Fanout Tubing Color: Aqua Fiber Count: 6

Tubing Length (Feet): 3 Ft Tubing Length (Inches): 37.88 in Tubing Outer Diameter: 2.0 mm Flammibility (Housing): Grade: ABS HI121 - 9059 BK | Test Standard: FMVSS 302 | 168 hrs. annealed at 80°C - Results: 54 mm/min Flammibility (Furcation Tubing): LSZH meets the requirements of IEC 61034-1, 61034-2, 60332-1-1, 60332-1-2, 60754-1, 60754-2 Temperature - Operation (Metric): 0 C to 70 C Temperature - Operation (US): 32 F to 158 F

Tech Info:

RoHS & Reach Compliant

Warranty:

Lifetime

Tech Support:

Lifetime

Assembly Instructions:

See the Assembly Instructions page for step-by-step simple instructions.


How To Purchase:

Purchase online, over the phone or email your purchase order. Call: 1-800-719-6791 or Email: solutions@ucon-x.com U.S. Patent No. 9,459,427 ©2020 oC2Plus. All Rights Reserved. All specifications are subject to change without further notice.

SKU: oCB1A21Plus103F. Category: Fiber Optic Fan-out Kits.

Weight *0.04 lbs*

Dimensions *6 × 6 × .5 in*

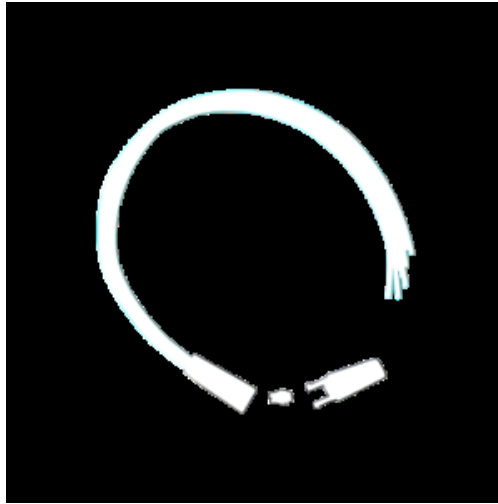

8 Fiber oC2Plus™ Fanout Kit 2 Ft

\$24.99

oC2Plus™ Fanout Kits are designed to be a labor-cost effective solution saving you both time and money. They are specifically designed for the termination of 6, 8, 12 and 24 fiber buffer tubes. These fanout kits provide the ultimate solution for those users who want a robust, simple, yet reliable and user-friendly product. The kits provide a compact, easy-to-install fanout solution requiring no additional hardware or space than that required for terminating tight-buffered cables. The fanout kit is available in standard lengths of 2 feet (31.12 inches) or 3 feet (37.88 inches). The kits have the capability for custom lengths, color of furcation tube, multi-configuration and multi-fiber solutions. Visit the Custom Quote page for custom requirement request.

Features:

- Compact ABS Hard Plastic Housing
- Plenum Jacket Furcation Tube with Aramid Yarn
- Snap-fit Function
- Eliminates the Requirement for Epoxy Glue
- 3-Piece Simple Step-by-Step Assembly
- Tensile Strength Exceeds Industry Standards by up to 230%
- Designed for Custom Multi-configuration and Multi-fiber Solutions
- Universal with any Manufacture's Cabling
- TIA/EIA-568-B Compliant
- Quality Level Meets or Exceeds ISO9001:2008

Specifications:

Environment: Indoor Housing Material: ABS Hard Plastic Housing Dimensions: 0.56 (H) x 2.62 (L) in Weight: .80 oz (6-8 strand) to .96 oz (12-24 strand) Fanout Type: Furcation Tube Product Type: Fiber Optic Fanout/breakout Kits Cable Type: Plenum Furcation Tube with Aramid Yarn (900 micron center tube) Fanout Tubing Color: Aqua Fiber Count: 8

Tubing Length (Feet): 2 Ft Tubing Length (Inches): 31.12 in Tubing Outer Diameter: 2.0 mm Flammibility (Housing): Grade: ABS HI121 - 9059 BK | Test Standard: FMVSS 302 | 168 hrs. annealed at 80°C - Results: 54 mm/min Flammibility (Furcation Tubing): LSZH meets the requirements of IEC 61034-1, 61034-2, 60332-1-1, 60332-1-2, 60754-1, 60754-2 Temperature - Operation (Metric): 0 C to 70 C Temperature - Operation (US): 32 F to 158 F

Tech Info:

RoHS & Reach Compliant

Warranty:

Lifetime

Tech Support:

Lifetime

Assembly Instructions:

Visit the [Assembly Instructions](#) page for step-by-step simple instructions.


How To Purchase:

Purchase online, over the phone or email your purchase order. Call: 1-800-719-6791 or Email: solutions@ucon-x.com U.S. Patent No. 9,459,427 ©2020 oC2Plus. All Rights Reserved. All specifications are subject to change without further notice.

SKU: oCB1A21Plus112F. Category: Fiber Optic Fan-out Kits.

Weight *0.04 lbs*

Dimensions *6 × 6 × .5 in*

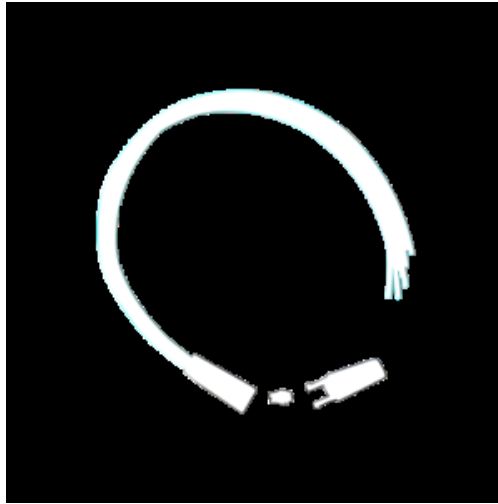

8 Fiber oC2Plus™ Fanout Kit 3 Ft

~~\$25.99~~ \$20.99

oC2Plus™ Fanout Kits are designed to be a labor-cost effective solution saving you both time and money. They are specifically designed for the termination of 6, 8, 12 and 24 fiber buffer tubes. These fanout kits provide the ultimate solution for those users who want a robust, simple, yet reliable and user-friendly product. The kits provide a compact, easy-to-install fanout solution requiring no additional hardware or space than that required for terminating tight-buffered cables. The fanout kit is available in standard lengths of 2 feet (31.12 inches) or 3 feet (37.88 inches). The kits have the capability for custom lengths, color of furcation tube, multi-configuration and multi-fiber solutions. Visit the Custom Quote page for custom requirement request.

Features:

- Compact ABS Hard Plastic Housing
- Plenum Jacket Furcation Tube with Aramid Yarn
- Snap-fit Function
- Eliminates the Requirement for Epoxy Glue
- 3-Piece Simple Step-by-Step Assembly
- Tensile Strength Exceeds Industry Standards by up to 230%
- Designed for Custom Multi-configuration and Multi-fiber Solutions
- Universal with any Manufacture's Cabling
- TIA/EIA-568-B Compliant
- Quality Level Meets or Exceeds ISO9001:2008

Specifications:

Environment: Indoor Housing Material: ABS Hard Plastic Housing Dimensions: 0.56 (H) x 2.62 (L) in Weight: .80 oz (6-8 strand) to .96 oz (12-24 strand) Fanout Type: Furcation Tube Product Type: Fiber Optic Fanout/breakout Kits Cable Type: Plenum Furcation Tube with Aramid Yarn (900 micron center tube) Fanout Tubing Color: Aqua Fiber Count: 8

Tubing Length (Feet): 3 Ft Tubing Length (Inches): 37.88 in Tubing Outer Diameter: 2.0 mm Flammibility (Housing): Grade: ABS HI121 - 9059 BK | Test Standard: FMVSS 302 | 168 hrs. annealed at 80°C - Results: 54 mm/min Flammibility (Furcation Tubing): LSZH meets the requirements of IEC 61034-1, 61034-2, 60332-1-1, 60332-1-2, 60754-1, 60754-2 Temperature - Operation (Metric): 0 C to 70 C Temperature - Operation (US): 32 F to 158 F

Tech Info:

RoHS & Reach Compliant

Warranty:

Lifetime

Tech Support:

Lifetime

Assembly Instructions:

Visit the [Assembly Instructions](#) page for step-by-step simple instructions.


How To Purchase:

Purchase online, over the phone or email your purchase order. Call: 1-800-719-6791 or Email: solutions@ucon-x.com U.S. Patent No. 9,459,427 ©2020 oC2Plus. All Rights Reserved. All specifications are subject to change without further notice.

SKU: oCB1A21Plus113F. Category: Fiber Optic Fan-out Kits.

Weight *.04 lbs*

Dimensions *6 × 6 × .5 in*

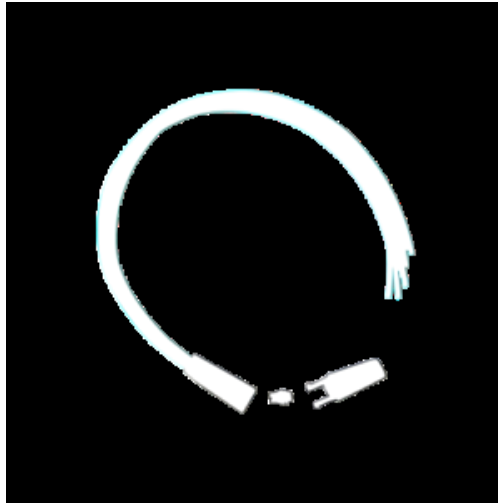

12 Fiber oC2Plus™ Fanout Kit 2 Ft

\$26.99

oC2Plus™ Fanout Kits are designed to be a labor-cost effective solution saving you both time and money. They are specifically designed for the termination of 6, 8, 12 and 24 fiber buffer tubes. These fanout kits provide the ultimate solution for those users who want a robust, simple, yet reliable and user-friendly product. The kits provide a compact, easy-to-install fanout solution requiring no additional hardware or space than that required for terminating tight-buffered cables. The fanout kit is available in standard lengths of 2 feet (31.12 inches) or 3 feet (37.88 inches). The kits have the capability for custom lengths, color of furcation tube, multi-configuration and multi-fiber solutions. Visit the Custom Quote page for custom requirement request.

Features:

- Compact ABS Hard Plastic Housing
- Plenum Jacket Furcation Tube with Aramid Yarn
- Snap-fit Function
- Eliminates the Requirement for Epoxy Glue
- 3-Piece Simple Step-by-Step Assembly
- Tensile Strength Exceeds Industry Standards by up to 230%
- Designed for Custom Multi-configuration and Multi-fiber Solutions
- Universal with any Manufacture's Cabling
- TIA/EIA-568-B Compliant
- Quality Level Meets or Exceeds ISO9001:2008

Specifications:

Environment: Indoor Housing Material: ABS Hard Plastic Housing Dimensions: 0.56 (H) x 2.62 (L) in Weight: .80 oz (6-8 strand) to .96 oz (12-24 strand) Fanout Type: Furcation Tube Product Type: Fiber Optic Fanout/breakout Kits Cable Type: Plenum Furcation Tube with Aramid Yarn (900 micron center tube) Fanout Tubing Color: Aqua Fiber Count: 12

Tubing Length (Feet): 2 Ft Tubing Length (Inches): 31.12 in Tubing Outer Diameter: 2.0 mm Flammibility (Housing): Grade: ABS HI121 - 9059 BK | Test Standard: FMVSS 302 | 168 hrs. annealed at 80°C - Results: 54 mm/min Flammibility (Furcation Tubing): LSZH meets the requirements of IEC 61034-1, 61034-2, 60332-1-1, 60332-1-2, 60754-1, 60754-2 Temperature - Operation (Metric): 0 C to 70 C Temperature - Operation (US): 32 F to 158 F

Tech Info:

RoHS & Reach Compliant

Warranty:

Lifetime

Tech Support:

Lifetime

Assembly Instructions:

Visit the [Assembly Instructions](#) page for step-by-step simple instructions.


How To Purchase:

Purchase online, over the phone or email your purchase order. Call: 1-800-719-6791 or Email: solutions@ucon-x.com U.S. Patent No. 9,459,427 ©2020 oC2Plus. All Rights Reserved. All specifications are subject to change without further notice.

SKU: oCB1A21Plus122F. Category: Fiber Optic Fan-out Kits.

Weight *.05 lbs*

Dimensions *5 × 5 × .05 in*

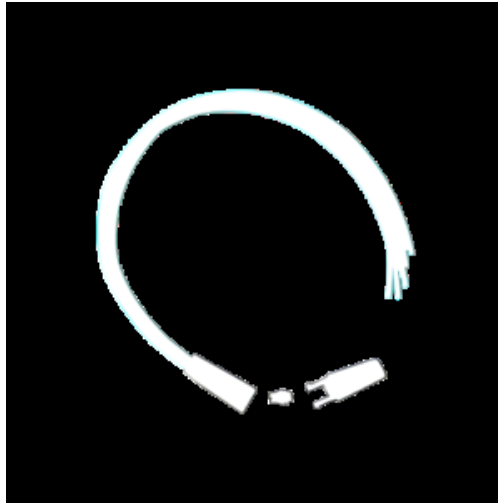

12 Fiber oC2Plus™ Fanout Kit 3 Ft

~~\$27.99~~ \$25.99

oC2Plus™ Fanout Kits are designed to be a labor-cost effective solution saving you both time and money. They are specifically designed for the termination of 6, 8, 12 and 24 fiber buffer tubes. These fanout kits provide the ultimate solution for those users who want a robust, simple, yet reliable and user-friendly product. The kits provide a compact, easy-to-install fanout solution requiring no additional hardware or space than that required for terminating tight-buffered cables. The fanout kit is available in standard lengths of 2 feet (31.12 inches) or 3 feet (37.88 inches). The kits have the capability for custom lengths, color of furcation tube, multi-configuration and multi-fiber solutions. Visit the Custom Quote page for custom requirement request.

Features:

- Compact ABS Hard Plastic Housing
- Plenum Jacket Furcation Tube with Aramid Yarn
- Snap-fit Function
- Eliminates the Requirement for Epoxy Glue
- 3-Piece Simple Step-by-Step Assembly
- Tensile Strength Exceeds Industry Standards by up to 230%
- Designed for Custom Multi-configuration and Multi-fiber Solutions
- Universal with any Manufacture's Cabling
- TIA/EIA-568-B Compliant
- Quality Level Meets or Exceeds ISO9001:2008

Specifications:

Environment: Indoor Housing Material: ABS Hard Plastic Housing Dimensions: 0.56 (H) x 2.62 (L) in Weight: .80 oz (6-8 strand) to .96 oz (12-24 strand) Fanout Type: Furcation Tube Product Type: Fiber Optic Fanout/breakout Kits Cable Type: Plenum Furcation Tube with Aramid Yarn (900 micron center tube) Fanout Tubing Color: Aqua Fiber Count: 12

Tubing Length (Feet): 3 Ft Tubing Length (Inches): 37.88 in Tubing Outer Diameter: 2.0 mm Flammibility (Housing): Grade: ABS HI121 - 9059 BK | Test Standard: FMVSS 302 | 168 hrs. annealed at 80°C - Results: 54 mm/min Flammibility (Furcation Tubing): LSZH meets the requirements of IEC 61034-1, 61034-2, 60332-1-1, 60332-1-2, 60754-1, 60754-2 Temperature - Operation (Metric): 0 C to 70 C Temperature - Operation (US): 32 F to 158 F

Tech Info:

RoHS & Reach Compliant

Warranty:

Lifetime

Tech Support:

Lifetime

Assembly Instructions:

Visit the [Assembly Instructions](#) page for step-by-step simple instructions.


How To Purchase:

Purchase online, over the phone or email your purchase order. Call: 1-800-719-6791 or Email: solutions@ucon-x.com U.S. Patent No. 9,459,427 ©2020 oC2Plus. All Rights Reserved. All specifications are subject to change without further notice.

SKU: oCB1A21Plus123F. Category: Fiber Optic Fan-out Kits.

Weight *.05 lbs*

Dimensions *5 × 5 × .5 in*

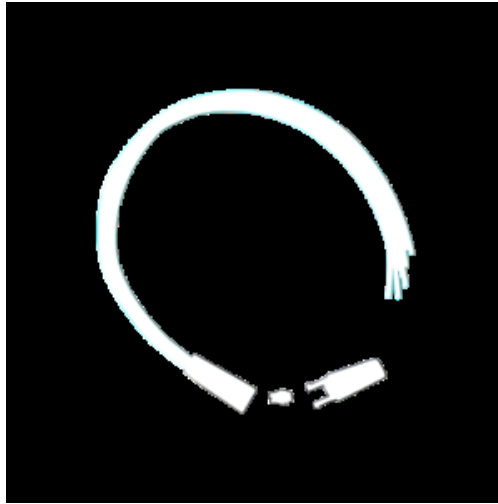

24 Fiber oC2Plus™ Fanout Kit 2 Ft

\$29.99

oC2Plus™ Fanout Kits are designed to be a labor-cost effective solution saving you both time and money. They are specifically designed for the termination of 6, 8, 12 and 24 fiber buffer tubes. These fanout kits provide the ultimate solution for those users who want a robust, simple, yet reliable and user-friendly product. The kits provide a compact, easy-to-install fanout solution requiring no additional hardware or space than that required for terminating tight-buffered cables. The fanout kit is available in standard lengths of 2 feet (31.12 inches) or 3 feet (37.88 inches). The kits have the capability for custom lengths, color of furcation tube, multi-configuration and multi-fiber solutions. Visit the Custom Quote page for custom requirement request.

Features:

- Compact ABS Hard Plastic Housing
- Plenum Jacket Dual-Link Furcation Tube with Aramid Yarn
- Snap-fit Function
- Eliminates the Requirement for Epoxy Glue
- 3-Piece Simple Step-by-Step Assembly
- Tensile Strength Exceeds Industry Standards by up to 230%
- Designed for Custom Multi-configuration and Multi-fiber Solutions
- Universal with any Manufacture's Cabling
- TIA/EIA-568-B Compliant
- Quality Level Meets or Exceeds ISO9001:2008

Specifications:

Environment: Indoor Housing Material: ABS Hard Plastic Housing Dimensions: 0.56 (H) x 2.62 (L) in Weight: .80 oz (6-8 strand) to .96 oz (12-24 strand) Fanout Type: Furcation Tube Product Type: Fiber Optic Fanout/breakout Kits Cable Type: Plenum Dual-Link Furcation Tube with Aramid Yarn (900 micron center tube) Fanout Tubing Color: Aqua

Fiber Count: 24 Tubing Length (Feet): 2 Ft Tubing Length (Inches): 31.12 in Tubing Outer Diameter: 2.0 mm Flammibility (Housing): Grade: ABS HI121 - 9059 BK | Test Standard: FMVSS 302 | 168 hrs. annealed at 80°C - Results: 54 mm/min Flammibility (Furcation Tubing): LSZH meets the requirements of IEC 61034-1, 61034-2, 60332-1-1, 60332-1-2, 60754-1, 60754-2 Temperature - Operation (Metric): 0 C to 70 C Temperature - Operation (US): 32 F to 158 F

Add'l Info:

The 24 fiber oC2Plus fanout kit is manufactured with 12 strand dual-link furcation tubes. It is designed to be terminated with uni-boot connectors.

Tech Info:

RoHS & Reach Compliant

Warranty:

Lifetime

Tech Support:

Lifetime

Assembly Instructions:

Visit the [Assembly Instructions](#) page for step-by-step simple instructions.


How To Purchase:

Purchase online, over the phone or email your purchase order. Call: 1-800-719-6791 or Email: solutions@ucon-x.com U.S. Patent No. 9,459,427 ©2020 oC2Plus. All Rights Reserved. All specifications are subject to change without further notice.

SKU: oCB1A21Plus242F. Category: Fiber Optic Fan-out Kits.

Weight *.05 lbs*

Dimensions *5 × 5 × .5 in*

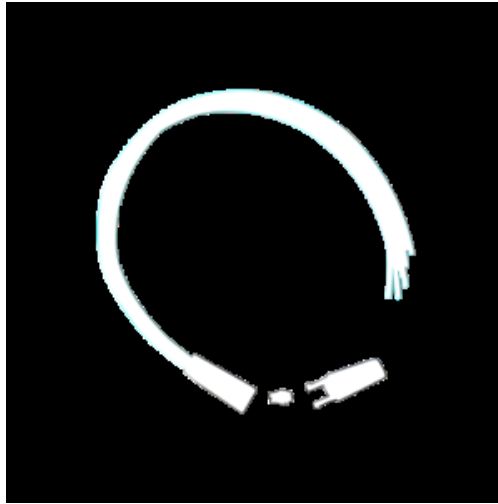

24 Fiber oC2Plus™ Fanout Kit 3 Ft

\$31.99

oC2Plus™ Fanout Kits are designed to be a labor-cost effective solution saving you both time and money. They are specifically designed for the termination of 6, 8, 12 and 24 fiber buffer tubes. These fanout kits provide the ultimate solution for those users who want a robust, simple, yet reliable and user-friendly product. The kits provide a compact, easy-to-install fanout solution requiring no additional hardware or space than that required for terminating tight-buffered cables. The fanout kit is available in standard lengths of 2 feet (31.12 inches) or 3 feet (37.88 inches). The kits have the capability for custom lengths, color of furcation tube, multi-configuration and multi-fiber solutions. Visit the Custom Quote page for custom requirement request.

Features:

- Compact ABS Hard Plastic Housing
- Plenum Jacket Dual-Link Furcation Tube with Aramid Yarn
- Snap-fit Function
- Eliminates the Requirement for Epoxy Glue
- 3-Piece Simple Step-by-Step Assembly
- Tensile Strength Exceeds Industry Standards by up to 230%
- Designed for Custom Multi-configuration and Multi-fiber Solutions
- Universal with any Manufacture's Cabling
- TIA/EIA-568-B Compliant
- Quality Level Meets or Exceeds ISO9001:2008

Specifications:

Environment: Indoor Housing Material: ABS Hard Plastic Housing Dimensions: 0.56 (H) x 2.62 (L) in Weight: .80 oz (6-8 strand) to .96 oz (12-24 strand) Fanout Type: Furcation Tube Product Type: Fiber Optic Fanout/breakout Kits Cable Type: Plenum Dual-Link Furcation Tube with Aramid Yarn (900 micron center tube) Fanout Tubing Color: Aqua

Fiber Count: 24 Tubing Length (Feet): 3 Ft Tubing Length (Inches): 37.88 in Tubing Outer Diameter: 2.0 mm Flammibility (Housing): Grade: ABS HI121 - 9059 BK | Test Standard: FMVSS 302 | 168 hrs. annealed at 80°C - Results: 54 mm/min Flammibility (Furcation Tubing): LSZH meets the requirements of IEC 61034-1, 61034-2, 60332-1-1, 60332-1-2, 60754-1, 60754-2 Temperature - Operation (Metric): 0 C to 70 C Temperature - Operation (US): 32 F to 158 F

Add'l Info:

The 24 fiber oC2Plus fanout kit is manufactured with 12 strand dual-link furcation tubes. It is designed to be terminated with uni-boot connectors.

Tech Info:

RoHS & Reach Compliant

Warranty:

Lifetime

Tech Support:

Lifetime

Assembly Instructions:

Visit the [Assembly Instructions](#) page for step-by-step simple instructions.

How To Purchase:

Purchase on-line, over the phone or email your purchase order. Call: 1-800-719-6791 or Email: solutions@ucon-x.com U.S. Patent No. 9,459,427 ©2020 oC2Plus. All Rights Reserved. All specifications are subject to change without further notice.

SKU: oCB1A21Plus243F-1. Category: Fiber Optic Fan-out Kits.

Weight *.05 lbs*

Dimensions *5 × 5 × .5 in*
